


Installation Instructions

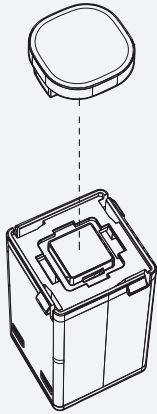

CLIPSAL® 30 MECH / HPM® LINEA® & EXCEL®

Product Code:
**KMCAP-CT-W/KMCAP-CT-BK/
 KMCAP-HL-W/KMCAP-HL-BK**

APP Installation

Visit www.kasta.com.au or your app store to download the free KASTA app.
 iOS: requires iOS 9.0 or later.
 Android: requires Android 4.4 or later.
 Devices must support Bluetooth 4.0



Important Safety Information

- This product must be installed by a licensed electrician in accordance with all the requirements of AS/NZS 3000 (current edition) and other relevant Standards and Regulations.
- Electricity MUST be disconnected prior to installation. Failure to do so may result in serious injury and or loss of life.
- Indoor use only. Not suitable for damp or explosive environments.
- Complies to Australian Standards AS/NZS 60950.1:2015, AS/NZS CISPR 15.
- No user serviceable parts inside.

FEATURES

- Mains powered curtain control module
- Compatible with standard bidirectional 4-wire motors (2 Active, 1 Neutral, 1 Earth).
- Single phase 240AC max. or 24VDC max. power.
- Simple 7 wire connection – A, N, Com, Open, Close, S1, S2.
- Install in conjunction with an appropriately rated momentary action mechanisms to S1 and S2.
- Can be paired with KASTA remote switches for either single button operation or two button operation (8x maximum).
- Smart functions via phone/tablet with the app such as schedules, timers, scenes and groups.
- Built in overvoltage and overcurrent protection.
- To prevent a reduction in Bluetooth® signal strength, install away from metal objects.

FUNCTION SETUP

*First calibrate curtain using KASTA app.

S1 CONNECTION

ON/PAUSE	1 CLICK
----------	---------

Open or pause curtain.

OPEN UNTIL RELEASED	LONG PRESS
---------------------	------------

Curtain opens until button is released.

S2 CONNECTION

ON/PAUSE	3 CLICKS
----------	----------

Close or pause curtain.

CLOSE UNTIL RELEASED	LONG PRESS
----------------------	------------

Curtain closes until button is released.

S1, S2 CONNECTION or RESET BUTTON

DELAY TO OFF	3 CLICKS*
--------------	-----------

Curtain will automatically close after set time.

PAIRING MODE	6 CLICKS
--------------	----------

Enter pairing mode for multi-way control. Lights will pulse.

FACTORY RESET	9 CLICKS
---------------	----------

Restores all settings back to factory.

TECHNICAL SPECIFICATIONS

Operating Temp: -20°C to 40°C

Supply: 220-240V AC 50Hz

CONNECTION DIAGRAM

