



# KASTA

Technologies

## Remote Switch 5-Input Module

**KASTA-5RSIBH**

### Bluetooth Remote Switch 5-Input Module



Remote Switch Input Module for the wireless control of KASTA devices from a wall switch with up to five individual mechanisms, or traditional 240V a.c. motion sensor. Configured via the free KASTA app for either momentary or toggle operation providing complementary control of KASTA devices, or for group or scene control.

#### Applications

Residential dwellings, Apartments,  
Commercial, Retail, Hospitality,  
Accommodation, New construction,  
Retrofit & Renovation

#### Accessories

Download the KASTA app

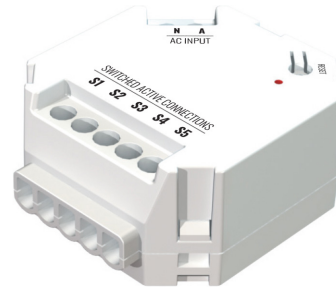


## FEATURES

- Wireless Bluetooth Mesh communication
- Communicate with and control other KASTA devices
- All five inputs support two modes of operation - Toggle Input and Momentary Switch Input
- **Toggle input mode** - used with toggle switch mechanisms, the load output from a sensor or relay output from another source (e.g. Assa Abloy® Ving-Card® system)
- **Momentary input mode** - used with momentary switch mechanism (short press and long press) or momentary relay output from another source
- Can be paired with KASTA devices for multi-way control (8x maximum)
- Each input can be linked to a device, group or scene through KASTA app
- Configured using the KASTA app (iOS and Android)
- Supports Group, Scene, Timer and Scheduling automation functions
- Built in overvoltage protection
- Suits all Australian wall plates using a momentary mechanism
- 3 year warranty

## ELECTRICAL

Power Supply	220-240V a.c. 50Hz
Physical Connection Type	Terminals
Wiring Connections	Active, Neutral, Momentary Mechanism or Sensor Load Output
Input Voltage (S1-S5)	240V a.c.
Form Factor	Module
Housing Material	Polycarbonate (PC)
Dimensions (WxDxH)	47mm x 52mm x 22.5mm
IP Rating	IP20
Operating Ambient Temperature	-20 to 50°C
Standards Complied	AS/NZS 60950.1 AS/NZS CISPR 15 AS/NZS 4268

#### CONNECTION DIAGRAM

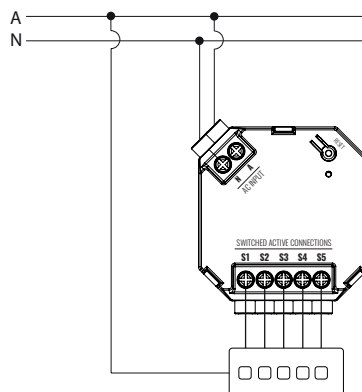

#### DIMENSIONS

