


Installation Instructions

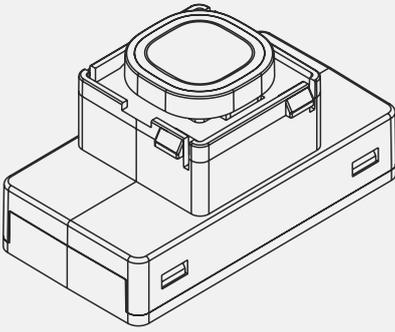

Smart Battery Powered Remote Switch Mechanism

Product Code:
KASTA-RB02-W

APP Installation

Visit www.kasta.com.au or your app store to download the free KASTA app.
iOS: requires iOS 9.0 or later.
Android: requires Android 4.4 or later.
Devices must support Bluetooth 4.0



Important Safety Information

• **IMPORTANT:** This accessory must be installed in accordance with national and local council building regulations, and the Australian and New Zealand wiring rules AS/NZS 3000 latest edition thereof.

ALL ELECTRICAL WORK MUST BE CARRIED OUT BY A LICENSED ELECTRICAL CONTRACTOR OR ELECTRICIAN.

- Turn off power at circuit breaker or fuse box, to make sure power is OFF before installation.
- For indoor use only. Not suitable for damp or explosive environments.

WARNING: This product contains 2x CR2032 coin batteries. A coin battery can cause serious internal chemical burns if swallowed.

WARNING: Dispose of used batteries immediately. Keep new and used batteries away from children. If you think batteries might have been swallowed or placed inside any part of the body, seek immediate medical attention.

CAUTION: To prevent damage to the appliance do not use alkaline cleaning agents or solvents when cleaning, use a soft cloth and a mild detergent.

Complies with Australian Standards AS/NZS 4268 and AS/NZS CISPR 15.

FEATURES

- Smart functions via phone/tablet with the app such as timers, scenes and groups.
- Pairs to existing hard wired KASTA devices including:
 - Switch Relays: KASTA-S2400IBH
 - KASTA-S350BH-W
 - Dimmers: KASTA-D300IBH
 - KASTA-D350BH-W
- Push Button Control.
- Fits most Australian Standard wall mech apertures.

FUNCTION SETUP

*Must be connected to a momentary action mechanism across T1/T2 terminal to perform setup.

ON/OFF SWITCH	1 CLICK
Turns lights on or off. When turned ON, lights will adjust to previous brightness setting.	
DIM UP/DOWN	ONE LONG PRESS
When lights are on, long press button to dim up or down. Release button to stop.	
FULL BRIGHTNESS	2 CLICKS
Sets lights to full brightness.	
DELAY TO OFF	3 CLICKS*
Lights automatically turns off after set time.	
SET MIN DIM LEVEL	4 CLICKS*
Dim to desired level. Click button 4 times to store setting. Only applicable when paired with Push Button Smart Dimmer or Hidden Smart Dimmer.	
RESET MIN DIM LEVEL	5 CLICKS
Restores back to factory minimum dimming level.	
PAIRING MODE	6 CLICKS
Enter pairing mode for multi-way dimming. Remote switch backlight will pulse.	
FACTORY RESET	9 CLICKS
Restores all settings back to factory.	

*If successful, light will pulse the number of times that the switch was clicked, indicating function.

TECHNICAL SPECIFICATIONS

Range: Up to 30m open air

Battery: CR2032 Lithium (x2)

Battery Life: 1-3 years (Approx 50,000 presses)

Operating Temp: -20°C to 40°C

CONNECTION DIAGRAM

