


Installation Instructions

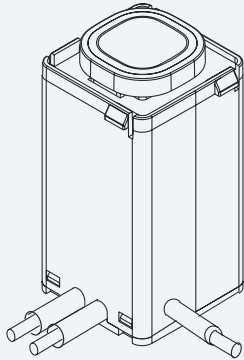

Unison™ Switch Relay Mechanism

Product Code:
MEPBLS1440-WH

APP Installation

Visit www.kasta.com.au or your app store to download the free KASTA app.
iOS: requires iOS 9.0 or later.
Android: requires Android 4.4 or later.
Devices must support Bluetooth 4.0



Important Safety Information

- This product must be installed by a licensed electrician in accordance with all the requirements of AS/NZS 3000 (current edition) and other relevant Standards and Regulations.
- Electricity MUST be disconnected prior to installation. Failure to do so may result in serious injury and or loss of life.
- Indoor use only. Not suitable for damp or explosive environments.
- Complies to Australian Standards AS/NZS AS/NZS 60669.2.1, AS/NZS 60669.1, AS/NZS CISPR 15
- No user serviceable parts inside.

FEATURES

- Relay for switching a load on and off.
- Push Button Control.
- Fits most Australian Standard wall mech apertures.
- Simple 3 wire connection-Active in, load out and neutral.
- Integral blue backlight that can be enabled/disabled after installation.

FUNCTION SETUP

ON/OFF SWITCH	1 CLICK
Turns load on or off.	
BACKLIGHT ON/OFF	7 CLICKS
Disables or enables backlight on button.	
FACTORY RESET	9 CLICKS

Restores all settings back to factory.
*If successful, light will pulse the number of times that the switch was clicked, indicating function.

TECHNICAL SPECIFICATIONS

Operating Temp: -20°C to 40°C

Supply: 220-240V AC 50Hz

Load: 480W

Thermal Derating: 25°C to 40° (480W-100 W)

CONNECTION DIAGRAM

ONE WAY SWITCHING

